

SCHWILLE ELEKTRONIK GMBH EMV LABOR
MESSUNG DER ELEKTRISCHEN FELDSTÄRKE

EUT: Pandora
Manuf: OpenPandora GmbH
Op Cond:
Operator: Manfred Schiedrich
Test Spec: Antenne V/ 0°/ 10 m
Comment:


File: 1410ef1.dat : New Measurement

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	OpRge
30MHz	1GHz	60kHz	120kHz	PK	2msec	0 dB	60dB

Transducer	No.	Start	Stop	Name
	22	20MHz	1GHz	CBL6111+

Final Measurement: X QP
Meas Time: 1sec
Subranges: 25
Acc Margin: 6 dB

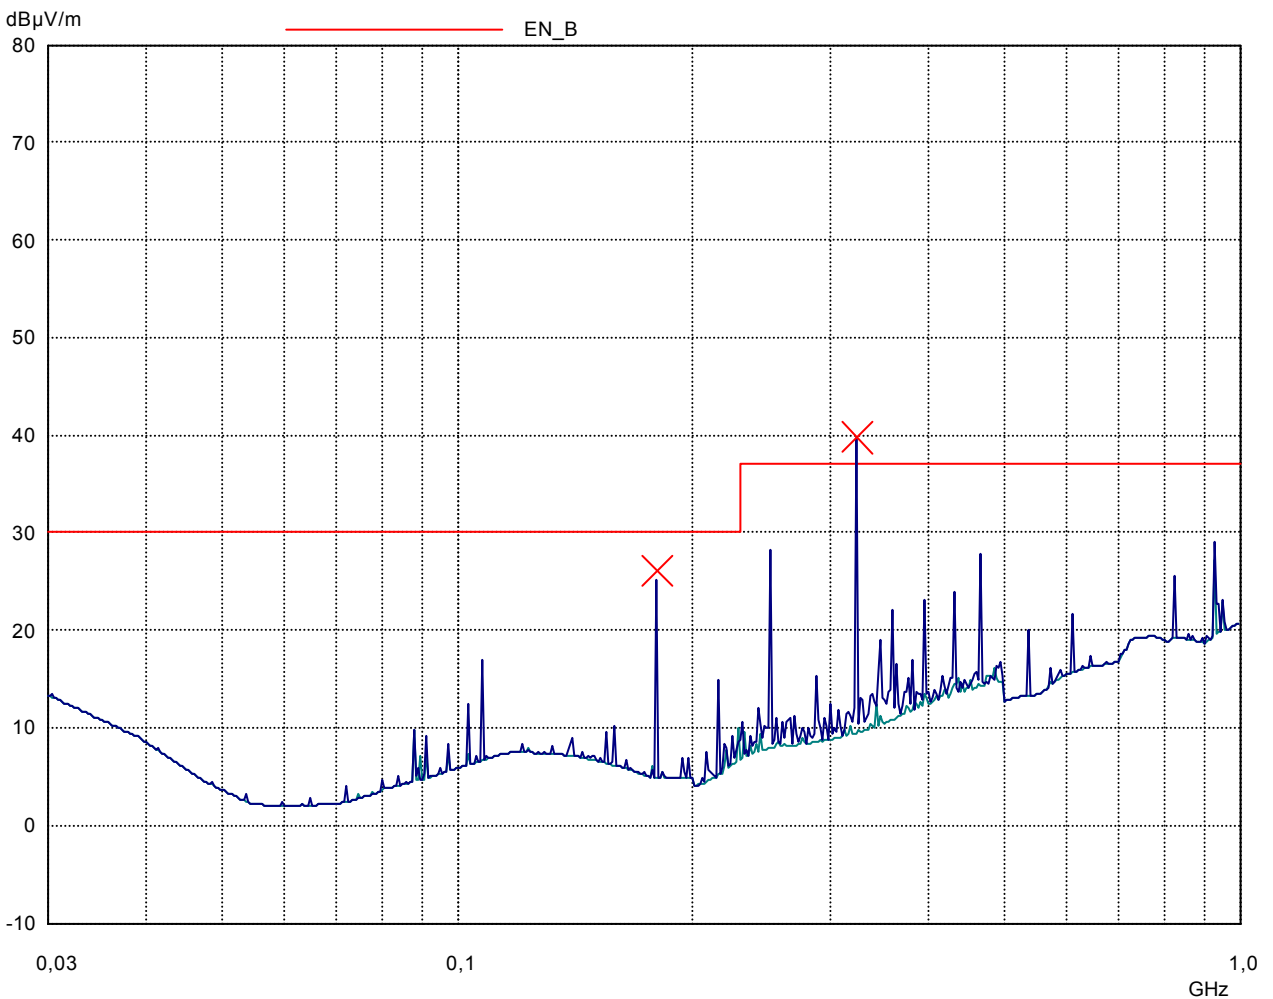

SCHWILLE ELEKTRONIK GMBH EMV LABOR

MESSUNG DER ELEKTRISCHEN FELDSTÄRKE

EUT: Pandora
 Manuf: OpenPandora GmbH
 Op Cond:
 Operator: Manfred Schiedrich
 Test Spec: Antenne V/ 0°/ 10 m
 Comment:

File: 1410ef1.dat : New Measurement

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	OpRge
30MHz	1GHz	60kHz	120kHz	PK	2msec	0 dB	60dB

Transducer	No.	Start	Stop	Name
	22	20MHz	1GHz	CBL6111+

Final Measurement: X QP
 Meas Time: 1sec
 Subranges: 25
 Acc Margin: 6 dB

Final Measurement Results:

Frequency GHz	QP Level dBµV/m	QP Limit dBµV/m	QP Delta dB	Ref. Offset dB
0,18	26,12	30,00	3,88	-21,34
0,324	39,74*	37,00	-2,74	-30,27

* limit exceeded